



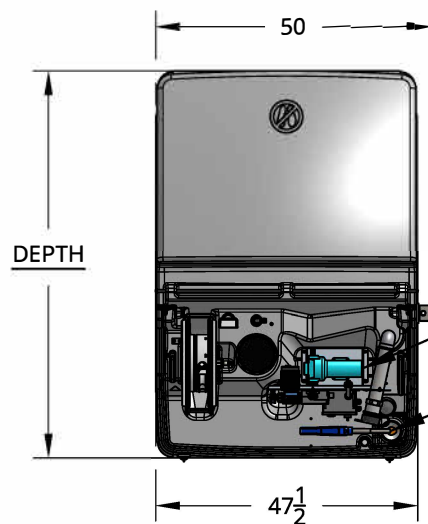

- TD10 PUMP
- INTERNAL PRESSURE SWITCH
  - 6 MIN TIMEOUT FUNCTION

STAINLESS STEEL AUTO-NOZZLE

LID HELD OPEN AT INDICATED HEIGHT WITH PNEUMATIC ARMS ATTACHED TO INSIDE OF LID

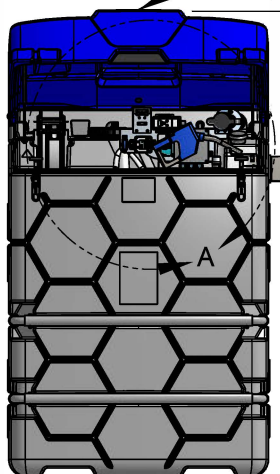


84 1/2  
MAX HEIGHT

[TEMPERATURE CONTROLLER FOR SUBMERSIBLE TANK HEATER]

25" HOSE REEL

FLUID LEVEL INDICATOR

NOTE: OPTIONAL COMPONENTS ARE LISTED IN SQUARE BRACKETS [ ].

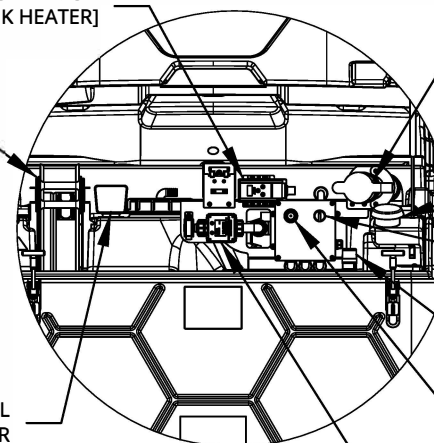

DETAIL A  
SCALE 1:20

2" STAINLESS STEEL DRY BREAK FILL PORT

TANK VENT


PUMP START/ TIMER RESET SWITCH

INTERSTITIAL LEAK INDICATOR

OVERFILL ALARM

TURBINE FLOW METER [PULSE OUT METER]

J-BOX FOR EXTERNAL ELECTRICAL TERMINATION

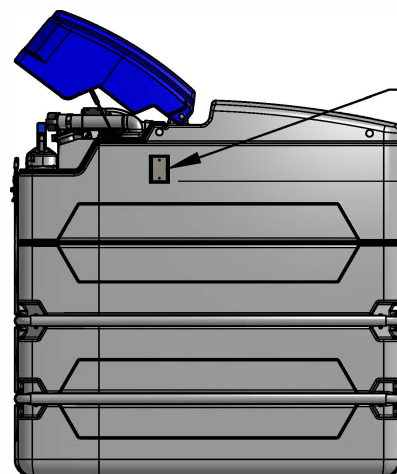

54  
J-BOX  
HEIGHT

NOTE: DIMENSIONS MAY VARY BY ±2%

### TANK OPTIONS

| TANK SIZE | DEPTH   |
|-----------|---------|
| 396G      | 44-1/2" |
| 660G      | 70-1/2" |



|                                             |       |            |     |
|---------------------------------------------|-------|------------|-----|
| PROJECT                                     |       |            |     |
| CUBE DEF STORAGE SYSTEM - 396/660G          |       |            |     |
| DWG. GENERAL FEATURE AND DIMENSION OVERVIEW |       |            | REV |
| DWG. NO.                                    | DRAWN | REV DATE   | 001 |
| SD-CUB-RPR-S0                               | PA    | 01/05/2023 |     |
| SCALE                                       | SIZE  | SHEET      |     |
| 1:35                                        | A     | 1 OF 1     |     |